




# Minimalist (Single Sided) Sliding Doors

Using 4mm glass or mirror

## Assembly Instructions V1 10.2018

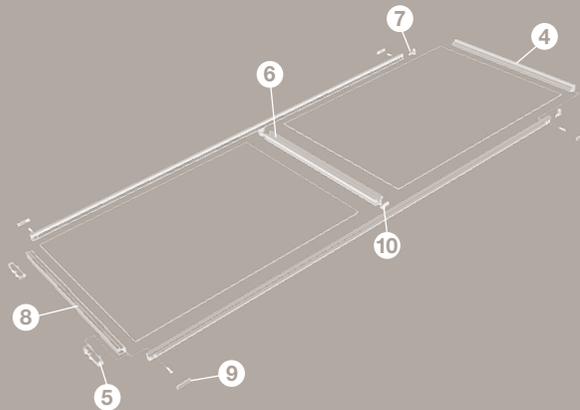

space·pro<sup>o</sup>  
HARDWARE

Wrap / apply clear glazing tape to the edge of the glass panel.

Note: The tape should wrap equally on both sides of the glass.

**1** Glazing Tape    Tape 155-90-20

**Warning:** Wear appropriate gloves to handle glass.

Viewed from back

Clear glazing tape.

Build the door front face down. Insert glass into the H-Section on both sides of the frame.

Bottom of the door

**2** H-Section & Handle    H-Section (silver) 3886-2400-AN  
H-Section (black) 3886-2400-BK

Viewed from back

Attach the bottom rail to the glass.


**3** Bottom Rail    Bottom rail (silver) 3885-2400-AN  
Bottom rail (black) 3885-2400-BK

Viewed from back



Attach the top rail to the glass.

**4** Top Rail

Viewed from back

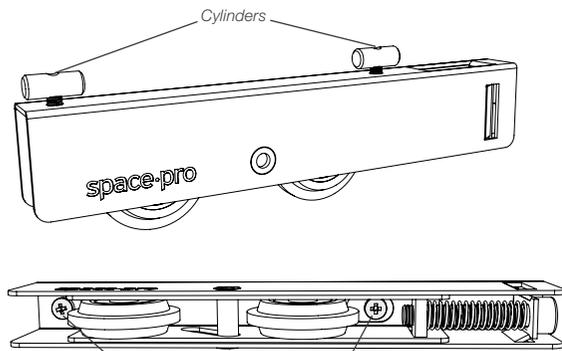


**A** Loosen the screws in the wheel to allow the cylinder to slide freely into the bottom rail.

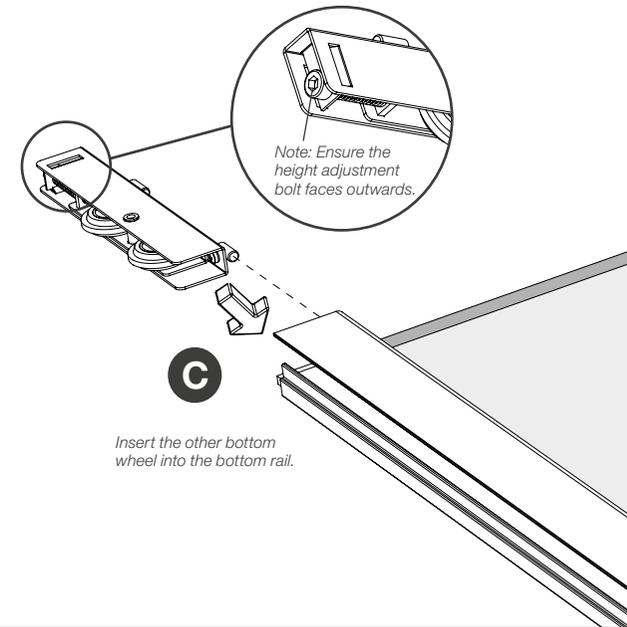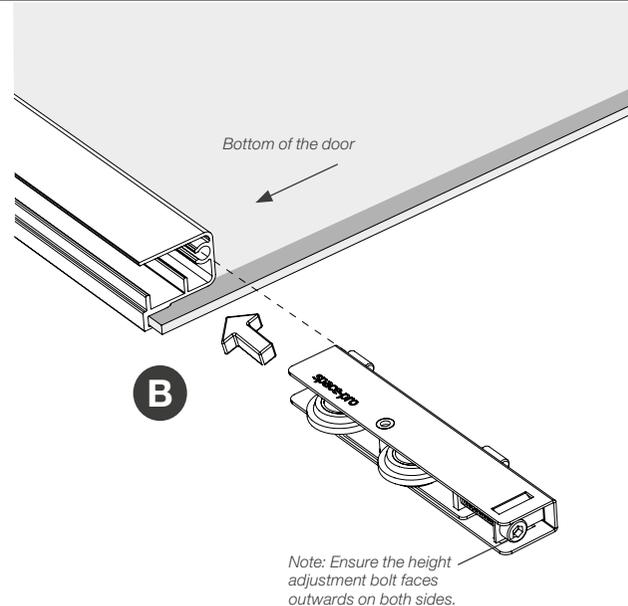


**5** Bottom Wheels Wheel 3912-001

Viewed from back

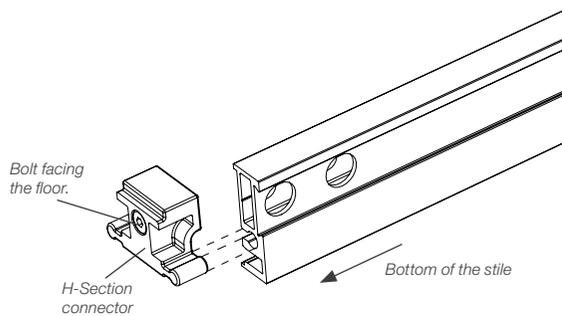


**A** Slide the H-Section connector into the matching hole in the stile.

Viewed from back

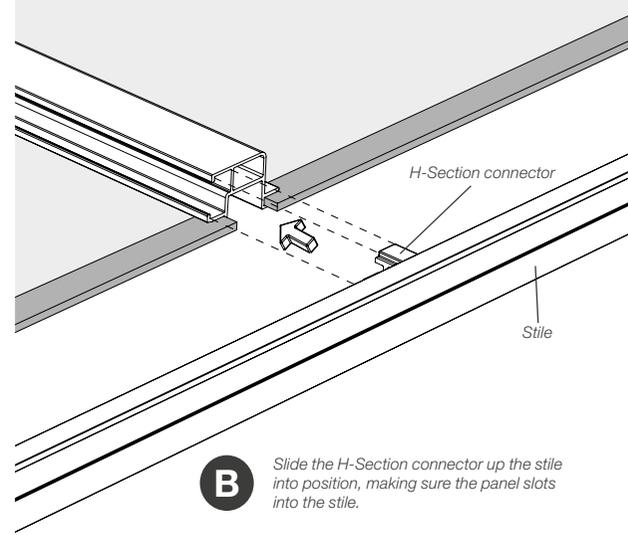

Viewed from back

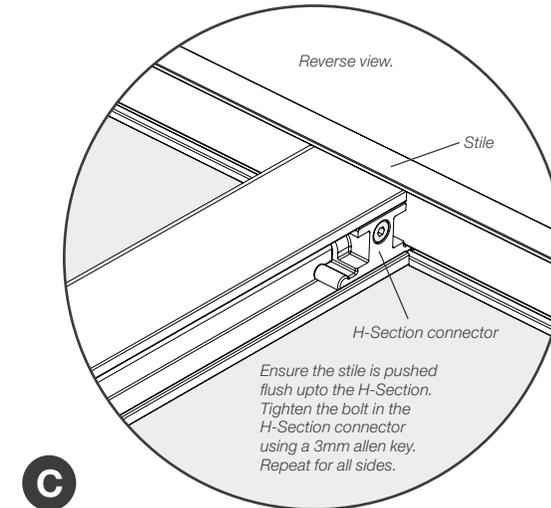

**6** Handles H-Section connector 3954-AN Stile (silver) 3884-2700-AN Stile (black) 3884-2700-BK

Note: Repeat step on both sides.

Top of the door

**B** After the top guide has been inserted, insert the screw into the hole and into the top rail.

**A** Insert the top guide into the square section of the stile.

Front of the door

Left-hand side

Right-hand side

Note: The top guides have a left and right-hand side and fit as instructed above.

**7** Top Guide

Top guide (left) 3956-LH  
Top guide (right) 3956-LH

Screw 3472-000

Bottom of the door

**A** Insert the screw into the stile which connects to the bottom rail.

**B** Push the bottom wheels up to the stile then tighten the two screws to fix in place.

**8** Bottom Rail

Screw 3472-000

Bottom of the door

Buffer pads

Insert the silicone buffer pads into the stile on the four corners. Ensure the bottom edge lines up with the end of the stile.

Tip: Put one edge in first, then push into place.

**9** Buffer Pad

Buffer pad (grey) 3763-GY  
Buffer pad (black) 3763-BK

Top of the door

Front of the door

Left-hand side

Right-hand side

Note: Each buffer pad should sit flush to the edge of the frame. Put a buffer pad into each of the 4 corners.

Viewed from front

Stile

H-Section

H-Section insert

Turn the door over onto its back, then insert the silicone H-Section insert by pushing it into place so it sits flush against the handle as shown above.

**10** Handle Pad

Handle pad (grey) 3895-GY  
Handle pad (black) 3895-BK